

EOLS-PR-GEU-30 Series Preliminary

Compliant with IEEE 802.3av™-2009 10GBASE-PR-U3

Single fiber bi-directional Transceiver

10.3125Gbps upstream and 10.3125Gbps downstream

RoHS6 Compliant

Features

- ◆ SFP+ Package with SC Receptacle
- ◆ Single +3.3V Power Supply
- ◆ 10.3125 Gbps / 1270 nm Burst-Mode
Transmitter with DFB laser
- ◆ 10.3125 Gbps / 1577nm High Sensitivity
Continuous-Mode APD-TIA Receiver
- ◆ LVTTTL Tx_Burst, Tx_SD, LOS
- ◆ LVTTTL Sleep Mode for Power Consumption
- ◆ Operating Case Temperature
Standard: 0°C~+70°C
- ◆ Compliant with Class 1 FDA and IEC60825-1
laser safety
- ◆ Compliant with SFF-8472 MSA
- ◆ Compliant with IEEE 802.3av
- ◆ Compliant with SFP+ MSA SFF-8431



Applications

- ◆ 10GBASE-PR-U3 application

Ordering information

Part No.	Input	Output	Burst-Mode	Fiber	Interface	Temp.
EOLS-PR-GEU-30-1*note1	AC	AC	LVTTTL	SMF	SC	Standard

Note1: Standard version

Regulatory Compliance

Feature	Standard	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883G Method 3015.7	Class 1C (>1000 V)


Electrostatic Discharge to the enclosure	EN 55024:1998+A1+A2 IEC-61000-4-2 GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022:2006 CISPR 22B :2006 VCCI Class B	Compatible with standards Noise frequency range: 30 MHz to 6 GHz. Good system EMI design practice required to achieve Class B margins. System margins are dependent on customer host board and chassis design.
Immunity	EN 55024:1998+A1+A2 IEC 61000-4-3	Compatible with standards. 1kHz sine-wave, 80% AM, from 80 MHz to 1 GHz. No effect on transmitter/receiver performance is detectable between these limits.
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN (IEC) 60825-1:2007 EN (IEC) 60825-2:2004+A1	CDRH compliant and Class I laser product. TüV Certificate No. 50135086
Component Recognition	UL and CUL EN60950-1:2006	UL file E317337 TüV Certificate No. 50135086 (CB scheme)
RoHS6	2002/95/EC 4.1&4.2 2005/747/EC 5&7&13	Compliant with standards ^{*note2}

Note2: For update of the equipments and strict control of raw materials, EOPTOLINK has the ability to supply the customized products since Jan 1th, 2007, which meet the requirements of RoHS6 (Restrictions on use of certain Hazardous Substances) of European Union.

In light of item 5 in RoHS exemption list of RoHS Directive 2002/95/EC, Item 5: Lead in glass of cathode ray tubes, electronic components and fluorescent tubes.

In light of item 13 in RoHS exemption list of RoHS Directive 2005/747/EC, Item 13: Lead and cadmium in optical and filter glass. The three exemptions are being concerned for Eoptolink's transceivers, because Eoptolink's transceivers use glass, which may contain Pb, for components such as lenses, windows, isolators, and other electronic components.

Functional Diagram

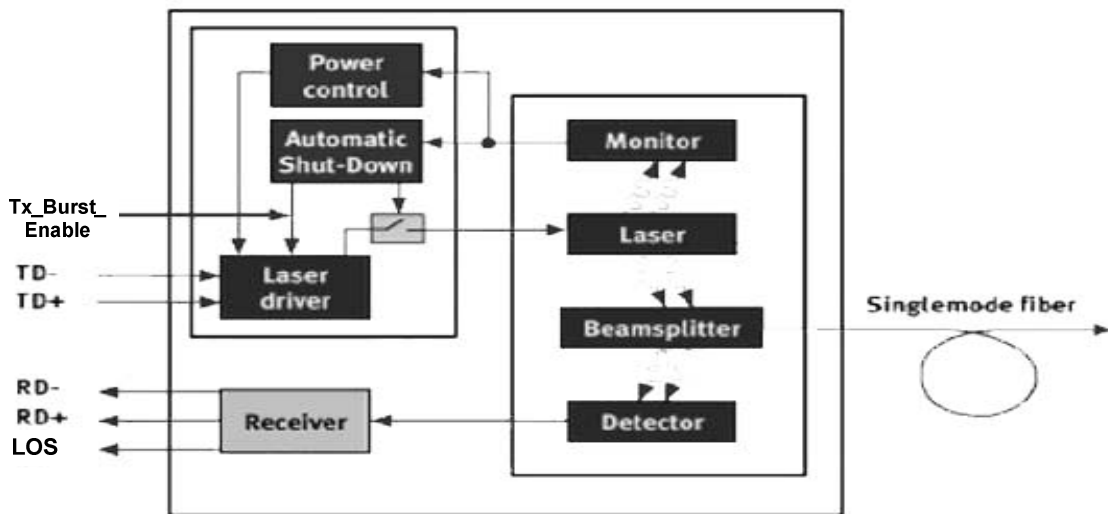

Product Description

EOLS-PR-GEU-30 Series is a transceiver for the optical network unit (ONU) of 10GEPON with 10.3125Gbps in downstream and 10.3125Gbps in upstream. EOLS-PR-GEU-30 series is high performance module for single fiber communications by using 1270nm burst-mode transmitter and 1577nm continuous-mode receiver.

The transmitter section uses a DFB 1270nm laser and is a class 1 laser compliant according to International Safety Standard IEC-60825-1. The receiver section uses an integrated 1577 nm detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

CML interface is used for differential inputs and outputs. LVTTTL logic control interface simplifies the interfaces to external circuitry.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T_s	-40	+85	°C
Supply Voltage	V_{CC}	-0.5	4.0	V
Operating Relative Humidity	Hopr	5	95	%

*Exceeding any one of these values may destroy the device permanently.

Recommended Operating Conditions

Parameter	Symbol		Min.	Typical	Max.	Unit
Operating Case Temperature	T_c	EOLS-PR-GEU-30-1	0		+70	°C
Power Supply Voltage	V_{CC}		3.15	3.3	3.45	V
Power Supply Current	I_{CC}				600	mA



10G EPON Series

Preliminary

Surge Current	I_{Surge}			+30	mA
Data Rate			10.3125		Gbps

Performance Specifications - Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Transmitter						
CML Inputs(Differential)	Vin	100		1000	mVpp	AC coupled inputs
Input Impedance (Differential)	Zin	85	100	115	ohm	
Tx_Burst_Enable Input Voltage	H	2		Vcc	V	
	L	0		0.8	V	
Tx_FAULT Output Voltage	H	2		Vcc+0.3	V	Transmitter Fault Triggered
	L	0		0.5	V	
Tx_SD Output Voltage	H	2		Vcc+0.3	V	Laser on indicator
	L	0		0.5	V	Laser off indicator
TX Fault Assert Time	T_{fault_assert}	-		50	ms	
TX Fault Reset time	T_{fault_reset}	10			us	
Receiver						
CML Outputs (Differential)	Vout	600		900	mVpp	AC coupled outputs
Output Impedance (Differential)	Zout	80	100	120	ohm	
Rx_LOS Output Voltage	H	2		Vcc+0.3	V	
	L	0		0.8	V	
Rx_LOS Assert time	T_{assert}	-		100	us	
Rx_LOS De-Assert time	$T_{De-assert}$	-		100	us	

Performance Specifications - Optical

Parameter	Symbol	Min.	Typical	Max.	Unit
Data Rate			10.3125		Gbps

Transmitter					
Centre Wavelength	λ_C	1260	1270	1280	nm
Spectral Width (-20dB)	$\Delta\lambda$			1	nm
Side Mode Suppression Mode	SMSR	30			dB
Average Output Power ^{*(note3)}	P _{out}	+4		+9	dBm
Extinction Ratio ^{*(note4)}	ER	6.5			dB
Transmitter Reflectance	R _t			-10	dB
Rise/Fall Time(with-out filter)	tr/tf			38	ps
Total Jitter	T _J			0.35	UI
Output Optical Eye ^{*(note5)}	IEEE Std 802.3av Compliant				
Optical Output Power with TX OFF ^{*(note6)}	P _{off}			-45	dBm
Path Penalty	P _p			1.5	dB
Receiver					
Centre Wavelength	λ_c	1575		1580	nm
Receiver Sensitivity ^{*(note6)}	P _{min}			-24.5	dBm
Receiver Sensitivity ^{*(note7)}	P _{min}			-29	dBm
Saturation Optical Power	P _{max}	-8			dBm
Receiver Reflectance	CR			-12	dB
LOS De-Assert	LOSD			-31	dBm
LOS Assert	LOSA	-43			dBm
Signal Detect Hysteresis ^{*(note8)}		0.5		6	dB
WDM Filter ISO	ISO(1560)			35	dB
	ISO(1600)			35	
RSSI resolution @ Full temperature range		-3		+3	dB

Note3: Output is coupled into a 9/125 um single-mode fiber.



Note4: Filtered, Measured with PRBS2³¹-1 test pattern @10.3125Gbps.

Note 6: Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps and ER=6dB, BER is less than 1E-12.



Note 7: Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps and ER=9dB, BER is less than 1E-3.

Note5: Eye pattern mask

Note 8: LOS Hysteresis

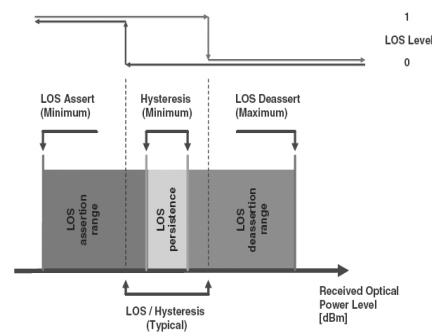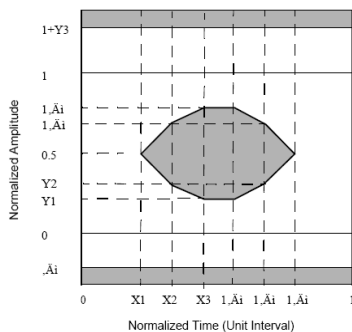

FP+ Transceiver Electrical Pad Layout

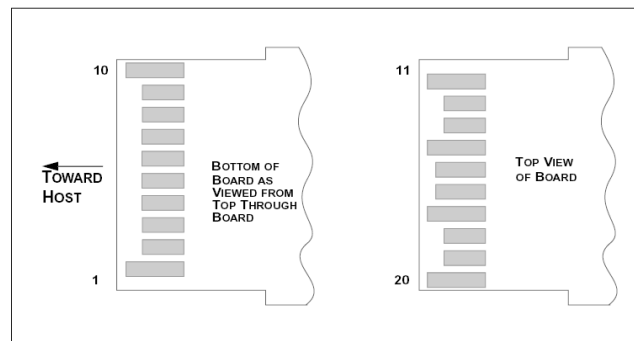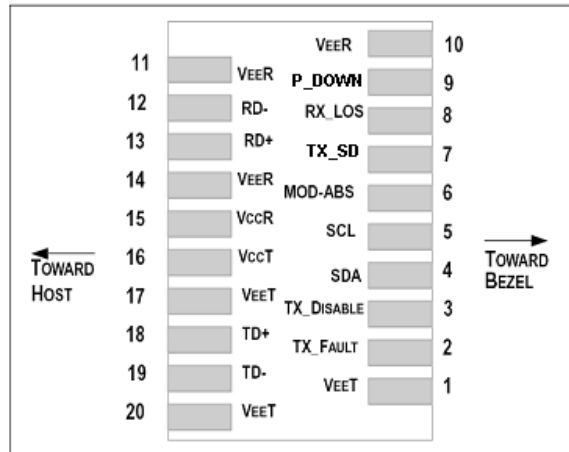

Pin Function Definitions

Pin Num.	Name	FUNCTION	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	Note 15
2	TX Fault	Transmitter Fault Indication	3	Note 9
3	TX_Burst_Enable	Burst Enable	3	Note 10, Module disables on high or open
4	SDA	Module Definition 2	3	Note 11, Data line for Serial ID.
5	SCL	Module Definition 1	3	Note 11, Clock line for Serial ID.
6	MOD-ABS	Module Definition 0	3	Note 11

7	TX_SD	TX signal detector (LVTTTL)	3	Note 12
8	RX_LOS	RX P_Down control	3	Note 13
9	P_Down	Power down (LVTTTL)	3	Note 14
10	VeeR	Receiver Ground	1	Note 15
11	VeeR	Receiver Ground	1	Note 15
12	RD-	Inv. Received Data Out	3	Note 16
13	RD+	Received Data Out	3	Note 16
14	VeeR	Receiver Ground	1	Note 15
15	VccR	Receiver Power	2	3.3 ± 5%, Note 17
16	VccT	Transmitter Power	2	3.3 ± 5%, Note 17
17	VeeT	Transmitter Ground	1	Note 15
18	TD+	Transmit Data In	3	Note 18
19	TD-	Inv. Transmit Data In	3	Note 18
20	VeeT	Transmitter Ground	1	Note 15

Notes:

Note9: TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.

Note10: TX_Burst_Enable is an input that is used to open the transmitter burst optical output. It is pulled up within the module with a 4.7 – 10 KΩ resistor. Its states are:

Low (0 – 0.8V): Default Transmitter burst on

(>0.8, < 2.0V): Undefined

High (2.0 – 3.465V): Default Transmitter burst off

Note11: SDA/SCL is the 2 wire serial interface, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. MOD_ABS is GND internal, which should be pulled up with a 4.7K – 10KΩ resistor on the host board, high indicates module is absence.

Note12: TX_SD is the indicator of TX signal. High indicates laser on, low indicates laser off.

Note13: RX_LOS control the RX side power down, LOS function is soft control via I2C.

Note14: Internal pulled up with a 4.7K – 10KΩ resistor internal. P_Down is a controller PIN for saving power consumption. If not use this feature, main board connection should be NC.

Low (0 – 0.8V): TX power saving is on and transmitter will be set to sleep mode.

(>0.8, < 2.0V): Undefined

High (2.0 – 3.465V) or NC: TX power saving off

EEPROM address A2h byte 110⁴ (Rate_Select State) is used as RX power saving bit.

When set to “1”, RX power saving is on and receiver will be set to sleep mode;

When set to “0”, Rx power saving is off


Note15: VeeR and VeeT may be internally connected within the SFP+ module.

Note16: RD-/+: These are the differential receiver outputs. They are AC coupled internal.

Note17: VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ±5% at the SFP+ connector pin. Maximum supply current is 600mA. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP+ input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP+ transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP+ transceiver module.

Note18: TD-/+: These are the differential transmitter inputs. They are AC-coupled inside the module.

TX_SD Timing Sequence

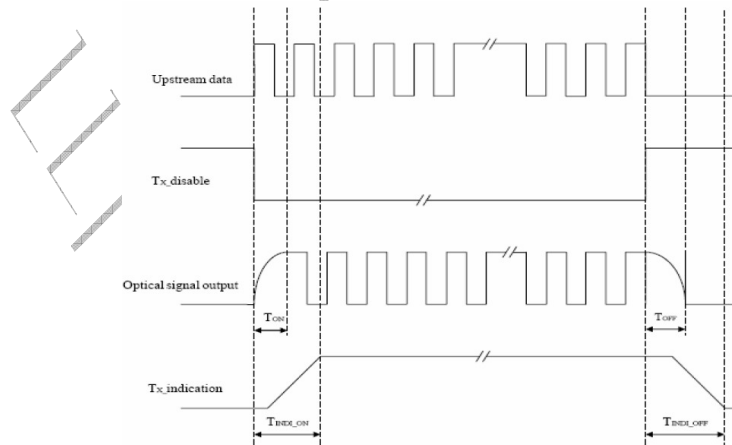


Parameter	Symbol	Min	Typ	Max	Unit
Tx_indication assert	Tindi-on			200	ns
Tx_indication deassert	Tindi-off			200	ns
Tx_burst on	Ton			100	ns

Tx_burst off	Toff			100	ns
--------------	------	--	--	-----	----

EEPROM

The serial interface uses the 2-wire serial CMOS EEPROM protocol defined for the ATMEL AT24C02/04 family of components. When the serial protocol is activated, the host generates the serial clock signal (SCL). The positive edge clocks data into those segments of the EEPROM that are not writing protected within the SFP+ transceiver. The negative edge clocks data from the SFP+ transceiver. The serial data signal (SDA) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.


The Module provides diagnostic information about the present operating conditions. The transceiver generates this diagnostic data by digitization of internal analog signals. Calibration and alarm/warning threshold data is written during device manufacture. Received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring all are implemented. If the module is defined as external calibrated, the diagnostic data are raw A/D values and must be converted to real world units using calibration constants stored in EEPROM locations 56 – 95 at wire serial bus address A2h. The digital diagnostic memory map specific data field define as following .For detail EEPROM information, please refer to the related document of SFF 8472 Rev 10.2.

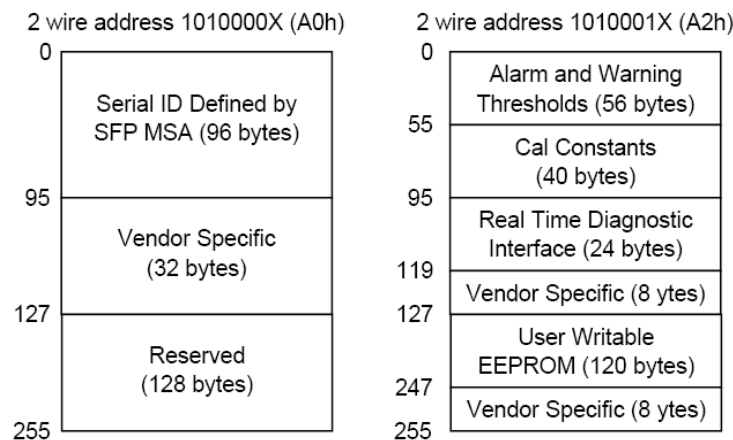


Digital Diagnostic Monitor Specification

Address	Parameter	Range	NOTES
96-97	Temperature	-40 to 125° C	Case temperature
98-99	Vcc Voltage	0V to 6.55V	
100-101	Bias Current	0 to 262mA	Unit 4uA
102-103	TX Power	-37 to 11.2 dBm	Unit 0.2uW
104-105	RX Power	-40 to 8.2 dBm	Unit 0.1uW

Recommend Circuit Schematic

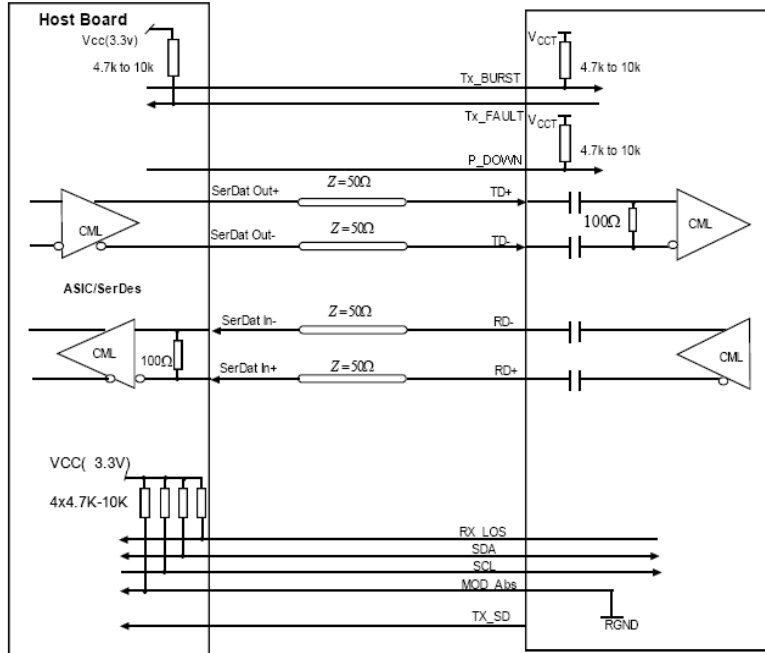

Mechanical Specifications

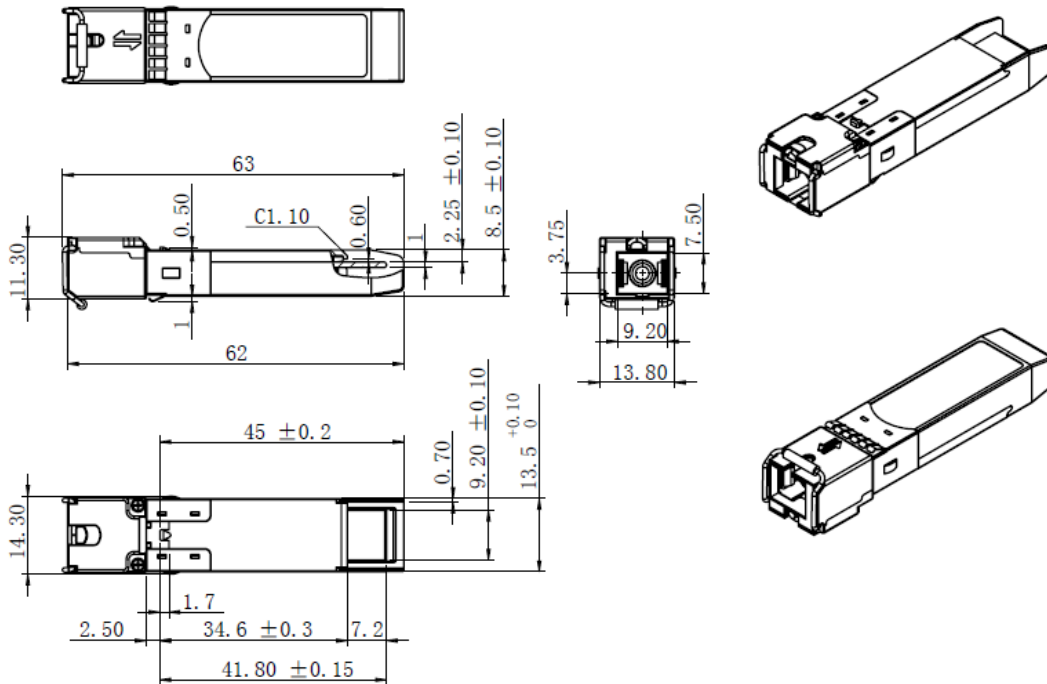

Eye Safety

This single-mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Obtaining Document

You can visit our website:<http://www.eoptolink.com>

Or contact Eoptolink Technology Inc., Ltd. listed at the end of the documentation to get the latest document.

Revision History

Revision	Initiated	Reviewed	Approved	DCN	Release Date
V1.a	Avrin /Phlio			Preliminary Released.	Aug. 22,2011
V1.b	Angela	Kelly		Update LOSD&LOSA	Nov 19,2012

Notice:

Eoptolink reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. Eoptolink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Contact:

Add: Floor 5 Building 2 No. 21 Gaopeng Avenue High-Tech District CHENGDU, SICHUAN 610041
P.R. CHINA

Tel: (+86) 028-85122709 ext 808 & 809

Fax: (+86) 028-85121912

Postal: 610041

E-mail:sales@eoptolink.com

<http://www.eoptolink.com>